




## Premium

Water-based PU/Acrylic Coating

# DATA SHEET




### Standard Colours

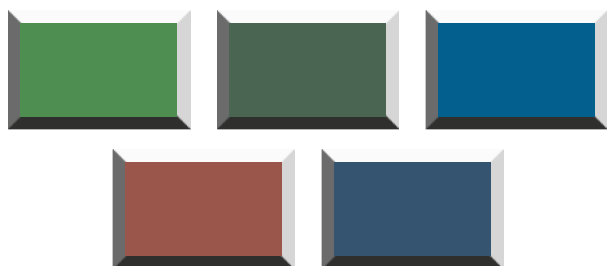

*The colour of the applied coating may differ from the above representation. Contact our Technical Service Department if an accurate sample is required. Special colours are also available on request.*

## Court Design

### Sports-Cote Premium

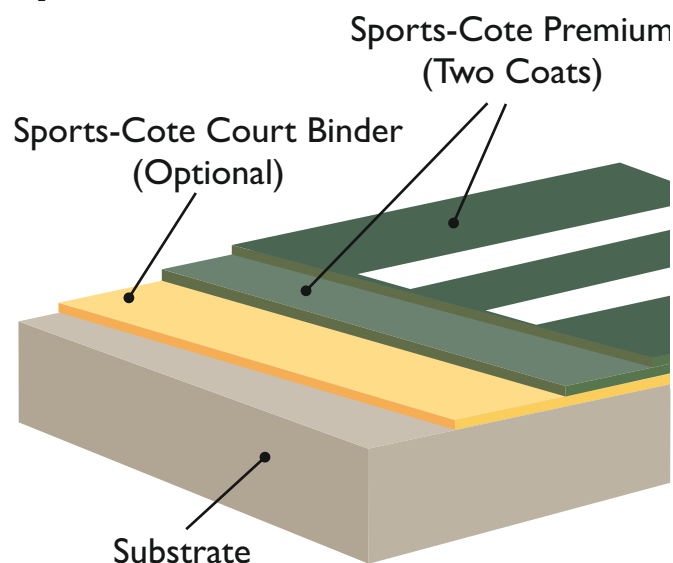

### Description

**Sports-Cote Premium** is a single pack water based coating designed for application to porous macadam tennis surfaces.

**Sports-Cote Premium** is formulated using water-based polyurethane and acrylic resin technology which provides an environmentally safe coating with the necessary player/surface interaction characteristics to meet the current standards.

### Uses

**Sports-Cote Premium** is used as a coating for porous macadam tennis courts.

**Sports-Cote Premium** will define the play area, enhance the appearance of the court and impart durability and slip resistance to comply with SAPCA's Code Of Practice for the Painting of Porous Macadam Tennis and Netball Courts ([www.sapca.org.uk](http://www.sapca.org.uk)).

### Model Specification

- Product: **Sports-Cote Premium**
- Number of coats: Two
- Finish: Extra Texture
- Colour: \_\_\_\_\_
- Substrate: Supplier's Instructions
- Preparatory work: Supplier's Instructions
- Application: Supplier's Instructions
- Supplier: Sports Coatings Limited
- Contact: Technical Service Department  
01440 766366

### Substrate and Preparatory Work

New macadam must be allowed to oxidise before coating and its surface should be grey and matt rather than black and glossy. The time it takes for oxidation to occur will vary depending on the nature of the surface and the climatic conditions. However, this will normally take between two and three weeks in the summer and may take up to three months in the winter. To minimise the softening effect of high temperatures prior to the application of **Sports-Cote Premium**, new macadam should be treated with **Sports-Cote Court Binder** (for further information please refer to the **Sports-Cote Court Binder** Technical Data Sheet).

All loose grit and other debris must be removed by vacuuming, blowing or sweeping prior to the application of **Sports-Cote Premium**. Moss should be removed with a proprietary chemical agent and the court cleaned by high pressure water jet. Aged or fretting courts should again be treated with **Sports-Cote Court Binder** (please refer to the relevant Technical Data Sheet). Previously coated substrates should be assessed for compatibility prior to application of **Sports-Cote Premium**.

# DATA SHEET



## Premium

Water-based PU/Acrylic Coating



### Application

Most heavy-duty airless spray units are suitable for spraying **Sports-Cote Premium**. (Please contact our Technical Service Department for further guidance). Tip sizes will usually be in the 30-36 thou range.

Application techniques do vary. However, using a hand held spray gun or lance **Sports-Cote Premium** should be sprayed in a systematic manner, usually in strips and with suitable overlap to achieve uniform coverage. Once the first coat is touch dry, the second coat can be applied at 90° to this.

### Thinning

**Sports-Cote Premium** can be thinned with cool, clean water up to a maximum of 10% by volume. Note that accurate metering is essential to ensure a uniform finish.

### Application Conditions

Tennis court painting should only be undertaken in fine, dry weather and when substrate temperature is higher than 5°C and likely to remain so for 6-7 hours after this. Substrate temperatures higher than 30°C should also be avoided. In this situation, however, the substrate can be cooled with water and allowed to dry before painting.

**Note: situations where frost may occur within 24 hours of painting must be avoided.**

### Packaging

20 litre pails.

### Coverage

6-8m<sup>2</sup>/litre/coat (average court size is 625m<sup>2</sup> including run offs, 3-4m<sup>2</sup>/litre is the paint requirement for a two coat application).

**Note: coverage will vary depending on substrate porosity, application temperature and technique.**

### Technical Information

Touch dry time: 2-4 hours at 20°C.  
Full cure: approximately 72 hours at 20°C.  
Abrasion resistance: 3.95% weight loss.  
Slip resistance: meets with the requirements of SAPCA's Code of Practice for the Painting of Porous Macadam Tennis and Netball Courts ([www.sapca.org.uk](http://www.sapca.org.uk)).

### Shelf Life

**Sports-Cote Premium** has a shelf life of approximately 12 months in original, unopened packaging.

### Storage

Store above 5°C in an environment safe from frost.

### Aftercare and Maintenance

Detailed guidance on the maintenance of painted courts may be found in SAPCA's Code of Practice for the Maintenance of Synthetic Sports Surfaces ([www.sapca.org.uk](http://www.sapca.org.uk)).

### Life Expectancy

If the court is used in accordance with its intended purpose **Sports-Cote Premium** will give acceptable performance for three to four years. However, certain factors will influence the performance of the coating and may well result in premature wear. Detailed guidance on the factors can be found in SAPCA's Code of Practice for the Maintenance of Synthetic Sports Surfaces ([www.sapca.org.uk](http://www.sapca.org.uk)).

### Health and Safety

**Sports-Cote Premium** is a water-based coating, making it relatively safe to use and minimising the risk of environmental impact from its usage. For more detailed information please refer to **Sports-Cote Premium's** current Material Safety Data Sheet.

### Further Information

To ensure you are specifying or applying a fit for purpose coating please contact our Technical Services Department.

#### Sports Coatings Ltd

Hawthorn House, Helions Bumpstead Road,  
Haverhill, Suffolk CB9 7AA, England

Tel: +44 (0)1440 766366

Fax: +44 (0)1440 768897

Email: [admin@sportscoatings.com](mailto:admin@sportscoatings.com)

Web: [www.sportscoatings.com](http://www.sportscoatings.com)

